



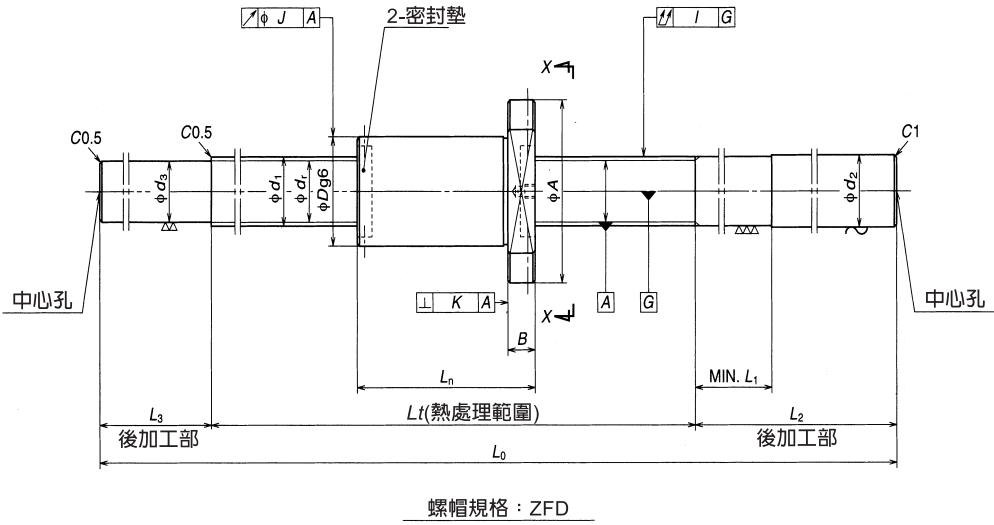

公稱型號	最大行程 L_1 - L_n	軸外徑 d_1	導程 l	滾珠直徑 D_w	滾珠間距直徑 d_m	螺桿軸紋溝底徑 d_r	有效圈數 圈數 × 列數	基本額定負載 (N)		預壓負載 (N)	動態摩擦扭矩 基準值 (N.cm)	螺帽				
								動態額定值 C_a	靜態額定值 C_{0a}			外徑 D	法蘭部			全長 L_n
													A	G	B	
W2502SS-1ZY-C5Z5	184	25	5	3.175	25.75	22.4	1 × 3	9790	22900	740	13.8	40	63	24	11	66
W2504SS-3ZY-C5Z5	334															
W2506SS-2ZY-C5Z5	534															
W2509SS-1ZY-C5Z5	834															
W2512SS-3ZY-C5Z5	1134															
W2504SS-4ZY-C5Z10	312	25	10	4.762	26.25	21.3	1 × 2	11400	21400	880	21.5	42	69	26	15	88
W2506SS-3ZY-C5Z10	512															
W2508SS-3ZY-C5Z10	712															
W2511SS-1ZY-C5Z10	1012															
W2515SS-2ZY-C5Z10	1412															

備註：1. 推薦使用NSK支撐座。
 2. 因供貨時，只塗了防銹油，因此，在使用時，請補充潤滑油脂(油或潤滑油脂)。
 3. 許可轉速係根據 $d_m \cdot n$ 值和危險速度而定。請參照B509頁。

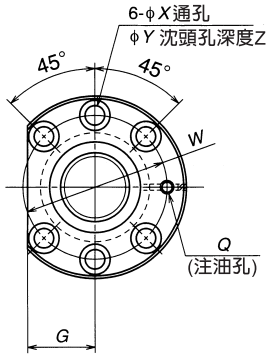

俯視X-X

單位：mm

B
204

尺寸					螺桿軸尺寸							導程精度			偏移精度			重量 (kg)	許可 轉速 dm·n N(rpm)
安裝孔				注油孔	有效螺紋	右軸端		左軸端		全長	目標值	誤差	變動	軸心偏	同軸度	直角度			
W	X	Y	Z	Q	L ₁	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	移I	J	K		
51	5.5	9.5	5.5	M6 × 1	250	25.2	40	200	22.4	—	450	-0.005	0.023	0.018	0.040	0.015	0.011	2.1	
					400			200		50	650	-0.009	0.025	0.020	0.060			2.8	
					600			250		100	950	-0.013	0.030	0.023	0.075			3.9	
					900			250		100	1250	-0.021	0.040	0.027	0.090			4.9	
					1200			300		100	1600	-0.028	0.046	0.030	0.120			6.2	
55	6.6	11	6.5	M6 × 1	400	25.2	60	200	21.3	50	650	-0.008	0.025	0.020	0.060	0.015	0.011	3.0	
					600			250		100	950	-0.012	0.030	0.023	0.075			4.1	
					800			250		100	1150	-0.017	0.035	0.025	0.090			4.8	
					1100			300		100	1500	-0.024	0.046	0.030	0.120			6.0	
					1500			300		100	1900	-0.034	0.054	0.035	0.150			7.4	